




Programmable switching systems for automated test,
data acquisition and communications

2555 Baird Road, Penfield, New York 14526 • cytec-ate.com • (800)346-3117 • (585)381-4740


16x2 or 32x1 Programmable HiPot Patch Panel! Cytec Model HXV/32-BP

FEATURES:

- 5000VAC or DC 1 pole HV relays.
- 19" rack mount x 15" deep x 5.25" tall (3 RU).
- 16x2, 32x1 or 8x4 configurations.
- Easy to use Binding post / banana jack connectors.
- GPIB and RS232 Control or
- 10/100 Ethernet LAN and RS232 remote control.
- Full LED display & remote status feedback.
- Manual Control for use without computer control.
- Simple command set and addressing.
- Programming examples available in all popular languages.
- Five Year Warranty! • Field proven for 20 years.

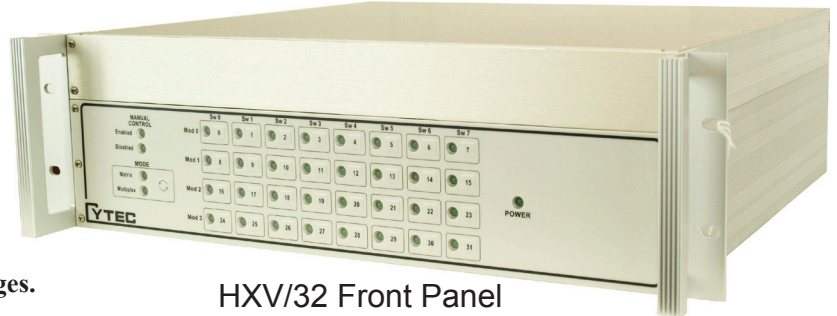

HXV/32 Front Panel

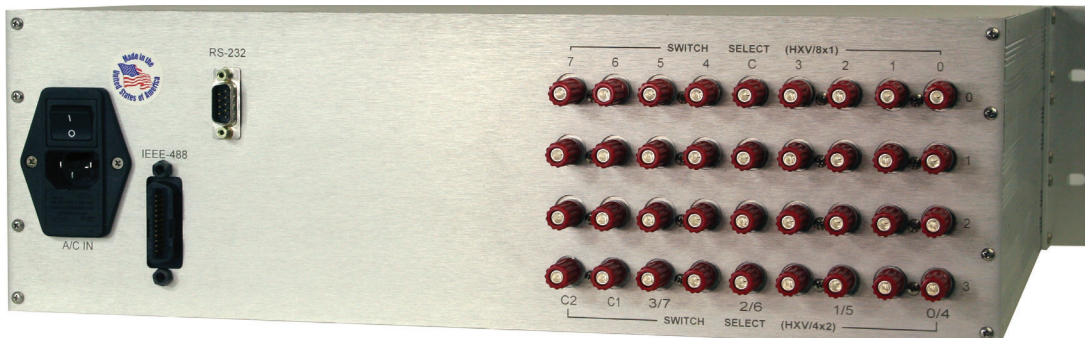

32x1 with GPIB and RS232 Rear Panel

SWITCH SPECIFICATIONS

Max Switched Power	200 Watts
Max Switched Voltage	3500 V Peak
Switch Current	3.0A
Breakdown Voltage	7500V peak, 5250 V RMS
Insulation Resistance	2.5 x 10E8 Ohms (250 Mohms)
Operating Time	3 ms
Life Expectancy	100 Million cycles cold switched 100,000 cycles at max power
Dimensions	19" rack mount x 15" D x 5.25" H
Weight	25 lbs

LabView, LabWindows and IVI drivers available.*
LabView and LabWindows are trademarks of National Instruments.

Cytec Model HXV/32 \$5,160.00 Complete

Specify Part Numbers: HXV/NxM-XXX

Where NxM = 32x1, 16x2 or 8x4

XXX = BP = Binding posts / Banana Jacks,

SBJ = Shrouded Banana Jacks,

SHV = High Voltage BNC with outer guard.

30 days ARO. Smaller and larger systems are available.

Many other module types available. Call or e-mail for quotes or technical help.

• View more of Cytec's HXV Series offerings.

• Contact Cytec at 1-585-381-4740 or sales@cytec-ate.com